



External Circulating Pump (Outside)

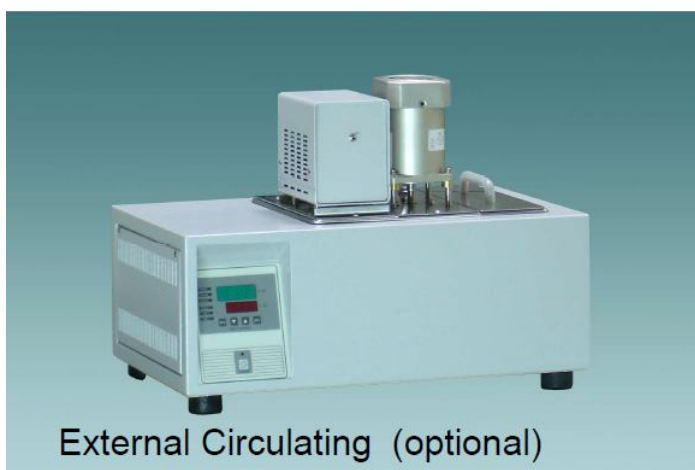

External Circulating (optional)

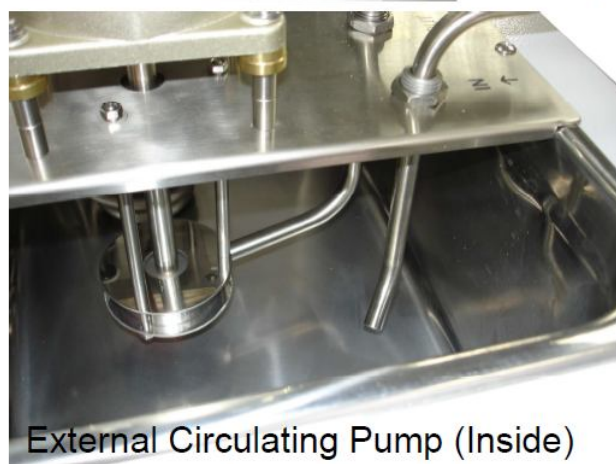

External Circulating Pump (Inside)

Specifications:

MODEL	MDB501	MDB502	MDB503
Temperature			
Working range	Ambient +5°C ~200°C	Ambient +5°C ~200°C	Ambient +5°C ~300°C
Stability	± 0.1°C	± 0.1°C	± 0.1°C
Setting/readout	Digital	Digital	Digital
Heater	1.2KW / 2KW	1.2KW / 2KW	1.5KW / 2KW
Stirring	By Built-in Circulation Pump		
Dimension (cm)			
Operation	W19.5 / D23.5 / H15	W39.5 / D29.5 / H15	W30 / D30 / H20
Overall	W54 / D34.5 / H37	W77 / D39.5 / H37	W66 / D40 / H42
Power source	110/220V 50/60Hz 13/10A	110/220V 50/60Hz 13 / 10A	110/220V 50/60Hz 14/10A
Weight	14 kg	17 kg	22 kg